C9500 COLOUR AND MONO PRINTER

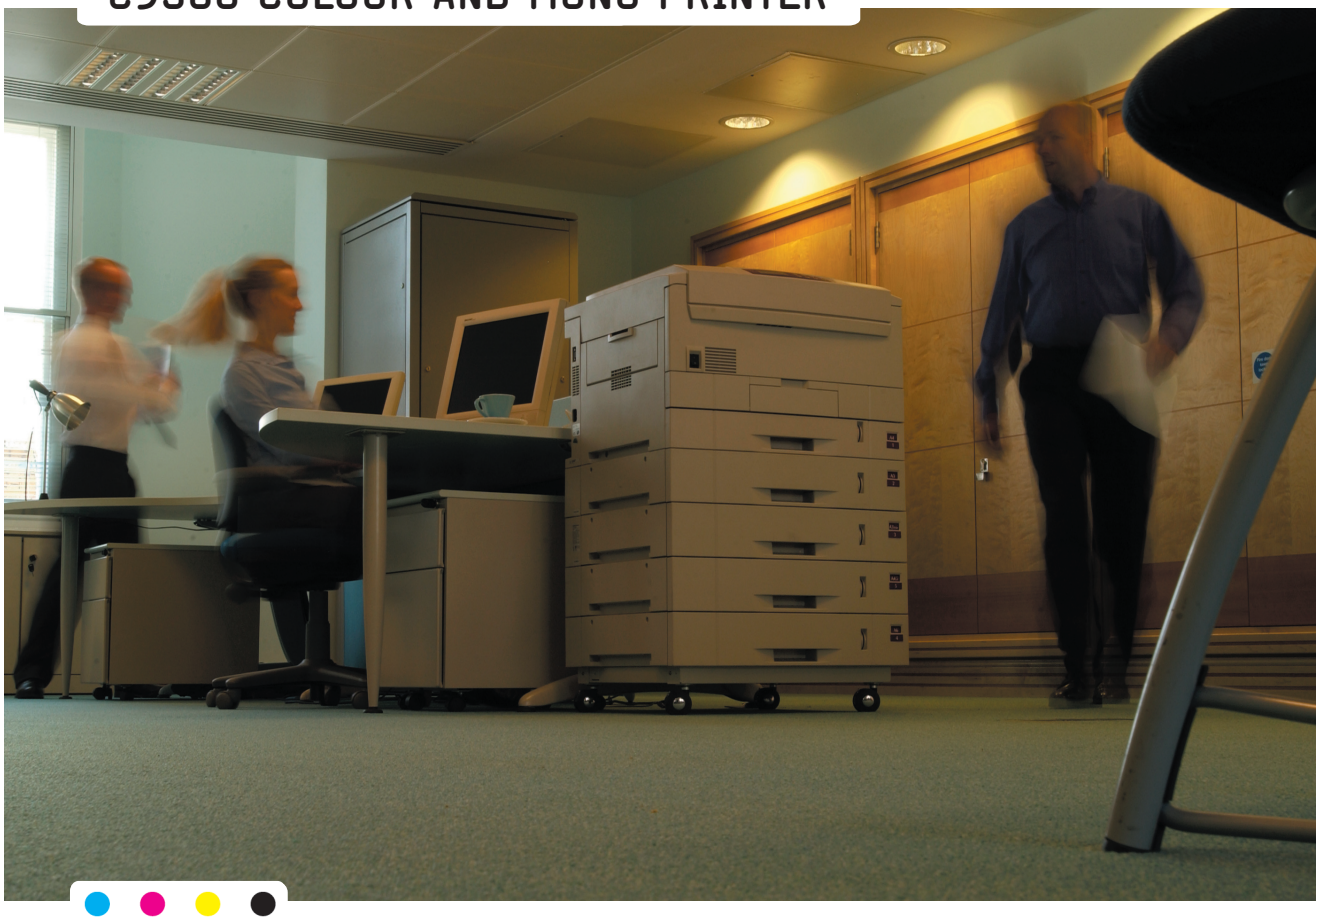

- C9500dn
- C9500hdn

FAST, AFFORDABLE PRINTING FOR LARGE WORKGROUPS

The C9500 is the ultimate A4 and A3 professional printer for large workgroup environments. Thanks to its LED technology, it prints high quality 30 pages per minute (ppm) colour and 37ppm mono at 1200 x 1200 dpi. Available in two models with networking and duplex printing as standard, the C9500hdn also includes 10GB Hard Disk Drive for fast multi-copy printing. With these excellent features and fast printing speed, the C9500 is the perfect choice for producing high quality customer-facing documents such as short-run brochures, targeted mailers, marketing campaign and point of sale materials.

MAIN FEATURES OF THE C9500

- Fast 30ppm colour and 37ppm mono printing to suit the most demanding workgroup
- Resolution 1200 x 1200 dpi
- LED technology delivers high speed and superb reliability
- PCL5c and PostScript® 3 emulations as standard
- Print on paper weights of up to 203gsm
- Intelligent features including Auto Colour Balance and Auto Media Detect
- Optional finishing delivers high capacity stacking, stapling, and hole-punching

The C9500 is the ultimate colour and mono printer for medium and large workgroups.

OKI

C9500 COLOUR AND MONO PRINTER

PRODUCT SPECIFICATION

		C9500dn	C9500hdn
Order number		01090801	01098701
Speed & throughput	A4 Print speed	30ppm colour, 37ppm mono	
	A4 OHP Speed	10ppm colour, 15ppm mono	
	A3 Print speed	16ppm colour, 20ppm mono	
	Time to first print	11.5 seconds colour, 10 seconds mono	
	Warm-up time	160 seconds	
	Processor speed	600MHz	
Print quality	Resolution	1200 x 1200 dpi	
	Enhancements	Automatic colour balance ensures colour at power on, when a new Image Drum/Toner cartridge is fitted and then every 500 pages (unless in middle of print job); Auto Registration occurs on power up, when the cover is opened and after 400 printed pages (not in middle of printed job); Toner Save mode	
	Colour matching	Oki Colour Matching, ICC-compliant colour profiles for ColorSync and ICM; EuroScale; SWOP simulations; Pantone Certification	
Typefaces	Printer fonts	80 scalable PCL fonts, 1 bitmap font, 10 TrueType fonts, 136 Adobe Type 1 fonts, OCR A/B, USPS Barcode	
	Printing process	Single Pass Digital LED electrophotographic page printer with four image drum cartridges	
Compatibility	Printer languages	Adobe PostScript 3 with direct PDF printing and PCL5c; Epson FX and IBM ProPrinter Dot Matrix emulations	
	Connectivity	IEEE 1284 Bi-directional Parallel and USB 1.1, 10/100BaseTX Ethernet card	
	OS Compatibility	Windows 95 / 98 / 98 SE / ME / NT4 Workstation / NT4 Server / 2000 Workstation / 2000 Professional / 2000 Server / 2000 Advanced Server / XP Professional / XP Home / NT Terminal Server Edition / 2000 Terminal Server with Citrix Metaframe 1.8 or CitrixMet	
	Utilities	Print Control Software (Hard Disk Drive required), PrintSuperVision, Oki Template Manager, Storage Device Manager	
Memory	RAM	320MB	
	Max. RAM	1024MB (optional 64MB, 128MB, 256MB, 512MB DIMMs)	
	10GB Hard Disk Drive	Optional	Standard
Paper-handling	Paper input	Internal trays: 1 tray containing 550 sheets, 200 sheets OHP; Max: 5 trays 2,750 total; Multi-purpose tray: 100 sheets	
	Paper weight	Internal and additional trays: 64–203gsm from any tray; Multi-purpose tray: 64–203gsm	
	Paper size	Internal and additional trays: 105mm—304.8mm width to 148mm—457.2mm length (including A6, A5, A4, A3 wide); Multi-purpose tray: 76.2mm—304.8mm width to 127mm—1,200mm length (including A6, A5, A4, A3 wide and banner media)	
	Duplex	Standard 75—105gsm	
	Paper feeding	Auto Media detect (Automatic paper weight detection), Auto Paper Tray Select, Tray Empty Sensor	
	Paper output	500 sheets face down, 100 sheets face up	
	Finishing options	2-tray stacker / puncher / stapler (Lower tray only) output device with 100 + 1,000 A4 sheet output capacity; Upper tray: 64gsm—200gsm face up, lower tray: 64gsm—104gsm face down	
Operating conditions	Temperature / Humidity (operating)	10°C—32°C (17°C—27°C recommended) / 20%—80% RH (50%—70% RH recommended)	
	Temperature / Humidity (storage)	-10°C—43°C , 10%—90% RH	
Power requirments	Power supply	Single phase 220—240VAC, frequency 50Hz ±2Hz	
	Power consumption	Typical 800W, Peak 1,400W, Idle 200W (average), Power save <75W	
Noise level		Operating: 55dB(A), Standby: 45dB(A), Power save: 43dB(A)	
Physical	Dimensions (HxWxD)	460 x 666 x 626mm	
	Weight (base unit)	72kg approx	
Duty cycle	Max. printer duty	150,000 pages/month	
Warranty	Standard	Pan European 1 year on-site	
Supplies life	Toner	15,000 pages @ 5% coverage per colour (printers are shipped with 7,500 pages worth of each toner @ 5% coverage)	
	Drum	30,000 pages (based on a typical office environment where 20% of printing is 1 page only, 30% is 3 page documents and 50% is print runs of 15 pages or more)	
	Fuser	80,000 pages	
	Transport belt	80,000 pages @ av. of 3 pages/job	
Scancopier		A3 Convenient copying solution; Copy speed: 34 seconds single page, 3.4ppm multi-page copy (via optional ADF), 30ppm multi-copy; Optical resolution: 600dpi, 24-bit colour. PostScript® 2.	

OKI

Only use genuine Oki Original consumables to ensure the best quality and performance from your hardware. Non Oki Original products may damage your printer's performance and invalidate your warranty. Specifications subject to change without notice. All trademarks acknowledged.

Oki, Network Solutions for a Global Society

Oki Europe, Part of Oki Electric

Oki Europe Ltd,
Central House, Balfour Road,
Hounslow, Middlesex, TW3 1HY,
United Kingdom
tel: +44 (0)20 8219 2190
fax: +44 (0)20 8219 2199
www.okieurope.com

energy®

As an ENERGY STAR Partner, Oki Europe Ltd has determined that this product meets the ENERGY STAR guidelines for energy efficiency

©2003 Oki Europe Ltd.